



GP 2721

#3

PATENT  
54-199P

## THE U.S. PATENT AND TRADEMARK OFFICE

Applicant: Mirosław Z. BOBER  
Appl. No.: 09/525,900 Group: 2721  
Filed: March 13, 2000 Examiner: UNASSIGNED  
For: METHOD AND APPARATUS FOR MOTION VECTOR  
FIELD ENCODING

RECEIVED  
JUL - 7 2000  
TECH CENTER 2700LETTER

Assistant Commissioner for Patents  
Washington, DC 20231

July 5, 2000

Sir:

Under the provisions of 35 U.S.C. § 119 and 37 C.F.R. § 1.55(a), the applicant(s) hereby claim(s) the right of priority based on the following application(s):

<u>Country</u>	<u>Application No.</u>	<u>Filed</u>
UNITED KINGDOM	9906034.5	March 16, 1999


A certified copy of the above-noted application(s) is(are) attached hereto.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fee required under 37 C.F.R. §§ 1.16 or 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH &amp; BIRCH, LLP

By

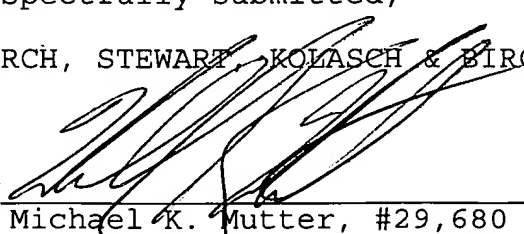  
Michael K. Mutter, #29,680MKM:jmj  
54-199PP.O. Box 747  
Falls Church, VA 22040-0747  
(703) 205-8000

Attachment

This Page Blank (uspto)

---



Birch, Stewart, Kolasch + Birch, LLP  
(703) 205 3000  
miroska Z. Bober  
09/525, 400  
3-15-00



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*M. Jenkins*

Dated

20 April 2000

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

**This Page Blank (uspto)**

---

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference	J00041255GB		
2. Patent application number (The Patent Office will fill in this part)	<b>9906034.5</b>		
3. Full name, address and postcode of the or of each applicant (underline all surnames)	Mitsubishi Electric Information Technology Centre Europe B.V. 20 Frederick Sanger Road The Surrey Research Park Guildford, Surrey GU2 5YD United Kingdom		
Patents ADP number (if you know it)  If the applicant is a corporate body, give the country/state of its incorporation	United Kingdom   <div style="text-align: right; font-size: 1.2em;">754 2769001</div>		
4. Title of the invention	METHOD AND APPARATUS FOR MOTION VECTOR FIELD ENCODING		
5. Name of your agent (if you have one)	R.G.C. Jenkins & Co		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	26 Caxton Street London SW1H 0RJ United Kingdom		
Patents ADP number (if you know it)	.950001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:			
a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	Yes.		

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	18
Claim(s)	7
Abstract	1
Drawing(s)	6

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature	<i>R.G.C. Jenkins &amp; Co</i>	Date
	R.G.C. Jenkins & Co	16 March, 1999

12. Name and daytime telephone number of person to contact in the United Kingdom
- Ms Holly Whitlock  
0171 931 7141

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

**Method and Apparatus for Motion Vector Field Encoding**

The present invention relates to a method and apparatus for encoding motion vector fields for sequences of digitised images.

5 It is well known to use the principle of motion compensation for compression of digitised motion pictures. In the majority of the known approaches, including MPEG-1, MPEG-2 and H263, motion compensation is performed using square or rectangular blocks of pixels, and a motion vector is assigned to each block. For example, it is known to compare a block of  
10 pixels, for example, a 16x16 block, with blocks in a preceding reference image, usually within a limited region of the reference image. The block in the reference image which is most similar to the current block under consideration is found, using an algorithm such as minimum mean square error, and a corresponding motion vector is associated with the current block. Thus,  
15 16x16 blocks in a current image are associated with a respective motion vector, as represented in Fig. 1. The motion vectors are subsequently quantized to either full-pel or sub-pel accuracy (usually half-pel or quarter-pel) and the result is usually encoded differentially.

Allocating a single motion vector to a block of pixels in an image in  
20 the known manner summarised above is useful for representing translation motion. However, there are a number of disadvantages in a block-based motion compensation approach of the type discussed above that can

significantly limit the performance in prediction algorithms. For example, such an approach does not perform well for regions including motion, such as a rotation or a change in scale, which is more complex than simple translational movement. Also, block-based prediction is poor for non-rigid motion, such as that exhibited by clouds or humans, for example. Further, the block-based approach imposes motion boundaries along the blocks and may not accurately reflect motion boundaries within the blocks. Furthermore, reconstructed images may exhibit "blocky" artefacts, especially in situations where a motion boundary runs across a block.

In order to alleviate such problems, some schemes have employed variable block size motion compensation with parametric motion models (including quasi-affine and affine motion models in addition to a translation one). In those schemes, the size of the block used for motion compensation and the motion model depends on how many moving objects are present within a region and on the complexity of the motion field. Such an approach offers some improvements over the approach using blocks of a fixed size, but the improvement is limited.

The present invention provides a method and apparatus for representing motion in a sequence of digitized images by deriving a dense motion vector field for an image and performing vector quantization on the motion vector field.



In the context of this specification, the term dense in relation to a motion vector field means that for a pixel block of size 8x8 pixels there are at least two motion vectors. For example, a motion vector may be assigned to each 4x4 pixel block or each 2x2 pixel block. Preferably, a motion vector is  
5 assigned to each pixel.

As a result of the invention, an efficient representation of the motion field can be obtained for coding. A reconstructed image with improved visual quality can be obtained, as a result of better prediction using motion compensation and because the number of artefacts can be reduced. In  
10 particular, blocking artefacts can be reduced or eliminated entirely. Also, the approach lends itself to a scaleable representation of the motion field, with increased robustness to transmission errors, discussed in more detail below.

The invention also provides a method and apparatus for representing motion in a sequence of digitized images by generating and coding a plurality  
15 of versions of a motion vector field at different resolutions.

As a result of the invention, a scaleable representation of the motion field and an embedded bit stream can be created. Thus, a coarse version of the motion vector field can easily be reconstructed by decoding a part of the bit stream. This has several advantages. For example, if part of the bitstream  
20 is corrupted in transmission, a low resolution version of the motion field can still be recovered and used for motion compensation. Alternatively, some applications may only require a coarse version of the field, and thus

processing power and memory requirements can be saved by reconstructing the coarse image directly from a truncated bitstream rather than reconstructing a full version then sub-sampling it to obtain a coarse version. Such an approach may be useful, for example, in video mobile telephones.

5           The invention also provides a method and apparatus for pre-processing a motion vector field to reduce the entropy without significantly reducing the prediction error. This can be done by averaging of the adjoining motion vectors, possibly with other constraints which limit the effects that such averaging may have on the quality of motion prediction and on the  
10       preservation of motion discontinuities.

          The invention also provides a method and apparatus for processing data relating to an image in a sequence of digitized images comprising which identifies where motion discontinuities occur in the image, and smoothes the motion vector field by combining adjacent motion vectors taking account of  
15       where motion discontinuities occur in the image.

          As a result, a more accurate reflection of the motion vector fields can be obtained.

          These and other aspects of the invention are set out in the appended claims.

20       Embodiments of the invention will be described with reference to the accompanying drawings of which:

Fig. 1 is a representation of a motion vector field according to the prior art;

Fig. 2 is a block diagram of an encoder according to an embodiment of the invention;

5 Fig. 3 is a representation of an image region showing discontinuity labels;

Fig. 4 is a block diagram of a component of the encoder shown in Fig. 2;

Fig. 5 is a representation of a bit stream output from the encoder  
10 shown in Fig. 2;

Fig. 6 is a block diagram of a decoder according to an embodiment of the invention; and

Fig. 7 is a block diagram of a hybrid DCT/MC codec according to an embodiment of the invention.

15 Fig. 2 is a block diagram of a multi-resolution motion vector field (MMVF) encoder according to an embodiment of the invention. The MMVF encoder as shown in Fig. 2 includes a motion estimator (ME) module 210 for generating a motion vector field and a motion discontinuity map for an image in a sequence of images input to the module. The output of the motion  
20 estimator module is connected to the input of an entropy reduction module 220, which is for processing the motion vector field using the motion discontinuity map to produce an entropy constrained motion vector field with

discontinuities. The output of the entropy reduction module 220 is connected to the input of a multi-resolution vector quantization motion field and discontinuities coding module 230, which is for producing a multi-resolution vector quantized (MMVF) representation of the motion vector field.

5           The operation of the MMVF encoder will be described in more detail below.

The motion estimator module 210 operates on a sequence of input image frames to produce dense motion vector fields, each with an associated motion discontinuity map.

10           A motion vector field for an image frame is derived using motion estimation based on the image frame and a reference frame. In this embodiment, the estimation is performed using reference frame which has been reconstructed from the coded version of the original of the reference frame and the consecutive, original, frame. As an alternative, for example,  
15           motion estimation could be performed using an original reference frame and the original consecutive frame.

The motion estimation is carried out using a variant of a known block-matching technique. A block of 16x16 pixels in the image frame is compared with blocks in the reference frame. When the closest match has been found, a  
20           corresponding motion vector is assigned to a reference pixel, which in this embodiment is the top left-hand pixel of the four centre pixels. In other embodiments, the reference pixel can be any pixel within an  $m \times n$  block, but

it is preferably close to or at the centre of the block. These steps are repeated for overlapping 16x16 blocks in the image frame in order to obtain a motion vector for each pixel in the image, and consequently a motion vector field for the whole image. Although the motion vector field produced in this manner may still exhibit a block-like structure, an accurate dense motion-vector field is recovered in the entropy reduction module 220. Other methods for obtaining a motion vector for a pixel, such as pel-recursive techniques or gradient-based methods can be used, as described in "Digital Pictures - Representation, Compression and Standards" by A. Netravali and B.G. Haskell, Plenum Publishing 1995.

The motion estimator module 210 also generates a motion discontinuity map reflecting motion discontinuities in the image frame. In general, motion discontinuities are located in between pixels, and so each pixel has four discontinuity labels 611, 612, 613, 614 associated with it, one for each of the top, bottom, right and left sides, as shown in Fig. 3. Each discontinuity label is shared between two adjacent pixels. For example, the right discontinuity label 612 for pixel 600 is the left discontinuity label 612 for the pixel 602 neighbouring pixel 600 on the right.

Motion discontinuities in the image are identified using a suitable technique, such as the technique described in the paper "Robust Motion Analysis" by M. Bober and J. Kittler, CVPR, 1994, pp 947-952. Briefly, statistical analysis is used to estimate the spread of residual errors in a block

with respect to the closest matching block in the previous frame. Pixels having a residual error outside an acceptable range are treated as belonging to a different motion region from those in the rest of the block. The boundaries between different motion regions are the motion discontinuities.

5           The motion vector field and the motion discontinuity map derived by the motion estimator module 210 are input to the entropy reduction module 220. The entropy reduction module 220 processes the motion vector field estimated in the motion estimator module 210, taking into account the motion discontinuity labels to preserve the motion boundaries, to produce an entropy-  
10   constrained motion vector field. The process is based on a pel-recursive technique, and is discussed in more detail below.

          The processing for a single pixel in the image will be described for a single pixel with reference to Fig. 3. The central pixel 600 and its four  
neighbours: top, left, right and bottom 601, 602, 603, 604 are considered. In  
15   addition, the four motion discontinuity labels 611, 612, 613, 614 for the central pixel 600 are considered. Each pixel has a motion vector associated with it, say pixel 600 has a motion vector V600, and so on. After processing, a new value of the motion vector V600 is calculated for the central pixel.

          The processing in this embodiment is based on taking a weighted  
20   average of the motion vectors of the centre pixel 600 and the motion vectors of those neighbouring pixels, 601, 602, 603, 604 which are not separated from the centre pixel by an active discontinuity label. More specifically,

$$V600x(i+1) = [(k * V600x(i)) + V601x(i) + \\ V602x(i) + V603x(i) + V604x(i)]/(k+4)$$

and

$$V600y(i+1) = [(k * V600y(i)) + V601y(i) + \\ V602y(i) + V603y(i) + V604y(i)]/(k+4)$$

5 where  $V60nx(i)$  and  $V60ny(i)$  are the motion vector components assigned to pixels  $60n$  in the  $i$ th iteration, and  $k$  is a constant greater than or equal to zero.

If one or more of the neighbouring pixels is separated from the centre pixel by an active motion boundary, it is omitted from the calculation, with  
10 adjustment of the denominator accordingly. For example, supposing the motion discontinuity label 611 is active, then  $V600x(i+1)$  is calculated as:

$$V600x(i+1) = [(k * V600x(i)) + V602x(i) + \\ V603x(i) + V604x(i)]/(k+3)$$

In an alternative embodiment, processing is again based on an average,  
15 but the prediction error is also taken into account.

More specifically,

$$V600x(i+1) = [(V601x(i) + V602x(i) + V603x(i) \\ + V604x(i))/4] - PE/(m + \nabla^2 I) * \nabla x I$$

$$V600y(i+1) = [(V601y(i) + V602y(i) + V603y(i) \\ + V604y(i))/4] - PE/((m + \nabla^2 I) * \nabla y I)$$

20

Here, PE is the prediction error, that is the difference in luminance values between the pixel 600 and the pixel in the reference frame after displacement using the motion vector calculated in iteration i, that is V600 (i), where V600 (i) = (V600x (i), V600y (i)).  $\nabla_x I$  and  $\nabla_y I$  are the components of the image intensity gradient for pixel 600. The image gradient in this embodiment is calculated based on the luminance values of the centre pixel and a neighbouring pixel. In particular,  $\nabla_x I = I_{602} - I_{600}$  and  $\nabla_y I = I_{601} - I_{600}$ , where  $I_{60n}$  represents the luminance value of pixel 60n. The image gradient can be calculated in other ways using neighbouring pixels. For example,  $\nabla_x I$  and  $\nabla_y I$  can be calculated as  $\nabla_x I = \frac{I_{602} - I_{604}}{2}$  and  $\nabla_y I = \frac{I_{601} - I_{603}}{2}$ .  $\nabla^2 I = (\nabla_x I)^2 + (\nabla_y I)^2$ , and m is a constant greater than 0. In this alternative embodiment, m = 100. Again, if one of the neighbouring pixels is separated by an active motion boundary, it is omitted from the calculation. Thus, supposing motion discontinuity label 611 is active, then

$$V600x(i+1) = [(V602x(i) + V603x(i) + V604x(i))/3] - PE / ((m + \nabla^2 I) * \nabla_x I)$$

In each of the alternative processing methods described above, the processing is performed for all the pixels in the image, and a number of iterations, or passes, are performed. The order in which the pixels are processed in a single pass does not significantly influence results. In these embodiments, 5-10 iterations are performed, although the optimal number of



iterations in other embodiments will depend on the type of motion estimator used.

As a result of the processing described above, a smoothed, entropy constrained, version of the motion vector field is obtained, with the motion discontinuities being preserved. By taking account of the motion discontinuity labels, and the prediction error in the second processing method described above, the smoothing is only performed in the areas where it does not reduce the efficiency of the motion compensation prediction. An example representation of a region of a motion vector field with motion discontinuities as output by the entropy reduction module 200 is shown, indicated as 225, in Fig. 2, where the circles represent pixels, the arrows represent motion vectors and the line between pixels represents a motion discontinuity.

The entropy constrained motion vector field with motion discontinuities produced by the entropy reduction module 220 is input to the multi-resolution motion vector field quantization (MMVFQ) and discontinuities coding module 230.

Fig. 4 shows the MMVFQ and discontinuities coding module in more detail.

Referring to Fig. 4, the motion vector field obtained from the entropy-reduction module 220 is input into a motion field pyramid module 310, which produces a set of  $n+1$  motion fields which are versions of the original motion vector field at descending spatial resolutions. The  $n+1$  motion fields have

image resolutions  $s_0$  to  $s_n$ , where the motion field at the original image resolution has resolution  $s_n$  and the coarsest resolution motion field has a resolution  $s_0$ . A motion field of resolution  $s_m$  is obtained by low-pass filtering and sub-sampling of the higher resolution motion of resolution  $s_{(m+1)}$ . This process is carried out  $n$  times starting from the original motion field to produce the  $n+1$  fields, called a pyramid of motion vector fields.

According to this embodiment, the sub-sampling factor  $k$  is 2, and the low pass filtering process averages the  $v_x$  and  $v_y$  values within a  $2 \times 2$  block. The average values  $v_{x\_aver}$  and  $v_{y\_aver}$  are then taken to represent the motion of the block at the coarser resolution. However, various sub-sampling factors  $k$  ( $k > 1$ ) and various low-pass filters can be used.

The pyramid of motion fields is then processed. The motion field at resolution  $s_0$  is encoded by a vector quantization (VQ) encoder 330a using a codebook  $c_0$ . The output from the VQ encoder 330a goes to a module 380a for entropy encoding to form a representation of the motion field at the coarsest resolution  $s_0$ , and to a VQ decoder 360a. The VQ decoder 360a uses the codebook  $c_0$  to reconstruct the coarse motion field, which is then passed to an up-sampling module 340a where the resolution of the motion field is increased by a factor of  $k$ . A differential module 350a calculates the difference between the motion field at resolution  $s_1$  and the up-sampled reconstructed motion field obtained from the field of resolution  $s_0$ . The residual error motion field at resolution  $s_1$  so obtained is output from the

differential module 350a to be processed by the VQ encoder 330b using a codebook c1. The steps described above are repeated recursively at increasing resolutions until the motion fields at all resolutions up to the original resolution have been processed, and n+1 component representations of the original motion vector field are obtained.

The vector quantization mentioned above is carried out on each of the motion vector fields in the encoding modules 330a - 330n. The vector quantization is analogous to that described in "Scalable image coding using Gaussian pyramid vector quantization with resolution-independent block size" by L. Cieplinski and M. Bober, Proceedings IEEE International conference on Acoustics, Speech and Signal Processing, 1997, vol. 4, pp 2949-2952, where vector quantization is described in relation to the luminance values of a still picture. The contents of that paper are incorporated herein by reference.

The vectors to which vector quantization is applied at each resolution can be formed in one of the following ways:

- 1) By grouping  $o$  ( $o > 1$ ) component velocities from non-overlapping regions in the velocity component fields  $V_x$  and  $V_y$  independently. The regions should have identical shape and should cover altogether the entire velocity field. For each region, two  $o$ -dimensional vectors are formed  $VQ_x = (vx_1, \dots, vxi, \dots, vxo)$ ,  $VQ_y = (vy_1, \dots, vyi, \dots, vyo)$ , where  $vxi$ ,  $vyi$  are the  $x$  and  $y$  velocity components of the pixel  $i$  within the block.

2) By performing a transformation on the vector field  $V$ , before forming the vectors as above. The purpose of the transformation is to make the component fields statistically independent, or to reduce their correlation in order to improve coding performance. For example, each vector  $v = (v_x, v_y)$  at each pixel location within the image may be transformed into log-polar representation  $vp = (v_{pr}, v_{pa})$ , where components  $v_{pa}$ ,  $v_{pr}$  are defined as:

$$v_{pr} = \text{square root } (v_x \cdot v_x + v_y \cdot v_y)$$

$$v_{pa} = \text{arc tangent } (v_y/v_x), \text{ if } v_x \neq 0.$$

$$\pi/2, \text{ if } v_x = 0 \text{ and } v_y > 0$$

$$-\pi/2, \text{ if } v_x = 0 \text{ and } v_y < 0.$$

For each region, two o-dimensional vectors will be formed  $VQ_r = (v_{pr1}, \dots, v_{prj}, \dots, v_{pro})$ ,  $VQ_a = (v_{pa1}, \dots, v_{paj}, \dots, v_{pao})$ , where  $v_{prj}$ ,  $v_{paj}$  are obtained from the transformation outlined above.

3) The component vectors  $VQ_x$ ,  $VQ_y$ , as defined in 2), can be grouped together to form the vector  $VQ = (VQ_x, VQ_y)$  or  $VQ = (VQ_r, VQ_a)$ , and  $VQ$  can be quantized. Naturally, the  $VQ$  vector formed in that way has the dimension  $2o$ .

In this embodiment method 2) above is used with rectangular blocks of  $2 \times 2$  pixels, so that  $VQ$  is performed on 4 dimensional vectors.

The component representations  $370 \dots 37n$  of the motion vector field output from the entropy coders  $380a - 380n$  are combined into an embedded

representation 260, as shown, for example, in Fig. 5, which shows the component representations at the different resolutions separated by separators.

A decoder 500 for decoding the embedded representation of the motion field to reconstruct the motion fields at different resolutions and the original motion vector field is shown in Fig. 6. The reconstruction starts from  
5 the coarsest resolution representation. It is decoded by an entropy decoder 510a and passed to a VQ decoder 515a, where it is decoded using the codebook c0 to obtain the reconstructed motion field at resolution s0. The reconstructed motion field at resolution s0 is then up-sampled by up-sampling  
10 module 525a, in the same way as in the encoder, to obtain an approximation of the field at resolution s1. The residual error for the motion field at resolution s1 is then reconstructed in a similar way. The residual error for resolution s1 and the field up-sampled from the field at resolution s0 are  
added together in a summation module to create a reconstructed motion field  
15 at resolution s1. The process is repeated at each finer resolution until the original resolution motion field is obtained. However, the process can be stopped at any resolution before the original resolution if desired.

Fig. 7 shows an hybrid DCT/MC codec for coding and decoding video image data according to an embodiment of the present invention.

20 The coder side comprises a DCT module 710 for performing discrete cosine transforms on the input image data. The DCT module 710 is connected to a adaptable quantizer 720 for performing adaptive quantization

on the DCT coefficients output from the DCT module. The quantizer 720 is controlled by a rate controller 730. The output of the quantizer 720 is connected to a variable length coder 740 and an inverse quantizer 750. The output of the inverse quantizer is connected to an inverse DCT module 760 for reconstructing a version of the original frame. The output of the DCT module 760 is connected to a plurality of frame stores 770. The outputs of the frame stores 770 are connected to a multi-resolution motion vector field (MMVF) coder 780, for deriving and encoding a motion vector field. The MMVF encoder 780 is connected to an advanced motion compensation module 790, for performing motion compensation in a known manner. The MMVF coder 780 also outputs data representing a coded motion vector field to the variable length coder 740, and the output of the variable length coder 740 is connected to a buffer 800. The buffer 800 is used to adjust the rate controller 730, and the stored data is output for transmission or recording on a recording medium.

Corresponding components are provided in the decoder, including a buffer 810, a variable length decoder 820, an inverse quantizer 830, an inverse DCT module 840, an advanced motion compensation module 850, frame stores 860, an MMVF decoder 870.

The coder and decoder operate essentially in a known manner for coding the video image data, apart from the coding and decoding of the motion vector field using the MMVF coder 780 and decoder 870. The MMVF coder 780 and decoder 870 operate essentially as described above.

However, here the variable length coder 740 and decoder 820 perform the entropy coding and decoding in place of the entropy coders 380a - 380n and decoders 515a - 515n as described above. It is possible to use a single variable length coder 940 in place of the n entropy coders 380a - 380n, employing different look-up tables for the image data at different resolutions, and likewise for the decoder 820.

The efficiency (based on the average number of bits per pixel) of the coding as described above can be similar to or better than for known methods. Although the allocation of a motion vector to each pixel increases the amount of motion information, this is reduced in subsequent processing, that is, in the entropy reduction processing and the vector quantization. The average number of bits per pixel will, of course, depend on the nature of data being coded.

In the embodiment of the invention described above, a motion discontinuity map is derived and used in subsequent processing, but it is not essential to take account of motion discontinuities. Instead of deriving a motion vector for each pixel, as in the described embodiment, the invention is also applicable to an approach where a motion vector can be assigned to a group of pixels, such as a 2x2 or 4x4 pixel block, for example. An important feature however is that the resulting motion vector field is dense.

The invention is particularly useful for applications dealing with sequences of images when one or more of the following conditions apply:

- i) channel bandwidth is limited
- ii) the risk of corruption of data is high, or
- iii) the user may benefit from obtaining a low-resolution version of the motion data.

5           Motion information derived and represented in accordance with the invention can be stored in database and used for search and browse purpose. For example, a person looking for a sequence of particular type of movement can first obtain coarse motion information from that database (storing motion vector information obtained in accordance with the present invention), and  
10       then retrieve a selected sequence at original resolution.



Claims

1. A method of representing motion in a sequence of digitized images comprising deriving a dense motion vector field for an image and  
5 performing vector quantization on the motion vector field.

2. A method as claimed in claim 1 wherein a motion vector is derived for pixel blocks sized less than an 8x8 pixel block.

10 3. A method as claimed in claim 1 wherein a motion vector is derived for each pixel.

4. A method as claimed in any one of claims 1 to 3 wherein vector quantization is performed on the components of the motion vectors  
15 separately.

5. A method as claimed in any one of claims 1 to 4 comprising performing variable length coding after vector quantization.

20 6. A method as claimed in any one of claims 1 to 5 comprising identifying where motion discontinuities occur in the image.

7. A method as claimed in any one of claims 1 to 6 comprising processing the motion vector field to reduce the entropy of the vector field before vector quantization.

5 8. A method as claimed in claim 7 dependent on claim 6 wherein the motion discontinuities are used in the entropy-reduction processing.

9. A method as claimed in claim 7 or claim 8 wherein entropy-reduction is performed by averaging neighbouring motion vectors.

10 10. A method as claimed in claim 9 dependent on claim 8 wherein a motion vector separated by a motion discontinuity is not used in the averaging.

15 11. A method as claimed in any one of claims 1 to 10 comprising generating and encoding a plurality of versions of a motion vector field at different resolutions.

20 12. A method as claimed in claim 11 comprising sub-sampling the motion vector field to produce sub-sampled versions of the field at a first, coarse, resolution and at a second, finer, resolution, coding the coarse resolution motion vector field, comparing the coarse resolution field with the

finer resolution field to produce a residual error, and coding the residual error at the finer resolution.

13. A method of processing data relating to an image in a sequence  
5 of digitized images comprising deriving a motion vector field for the image  
and smoothing the motion vector field by replacing a given motion vector by  
a new motion vector derived using averaging based on adjoining motion  
vectors, the method further comprising identifying where motion  
discontinuities occur in the image and omitting a motion vector or vectors  
10 from the averaging if they are separated from the given motion vector by a  
motion discontinuity.

14. A method as claimed in claim 13 wherein the new motion  
vector is derived using a prediction error.

15

15. A method of processing data relating to an image in a sequence  
of digitized images comprising deriving a motion vector field for the image  
and smoothing the motion vector field by replacing a given motion vector by  
a new motion vector derived using averaging based on adjoining motion  
20 vectors and on a prediction error.

16. A method as claimed in claim 15 comprising identifying where motion discontinuities occur in the image and omitting a motion vector or vectors from the averaging if they are separated from the given motion vectors by a motion discontinuity.

5

17. A method as claimed in any one of claims 13 to 16 wherein a motion vector is derived for each pixel.

18. A method as claimed in any one of claims 13 to 17 wherein the  
10 averaging takes account of the given motion vector.

19. A method as claimed in claim 18 using a weighted average.

20. A method of processing data relating to an image in a sequence  
15 of digitized images comprising deriving a motion vector field for the image, identifying where motion discontinuities occur in the image, and smoothing the motion vector field by combining adjacent motion vectors taking account of where motion discontinuities occur in the image.

20 21. A method as claimed in claim 20 wherein a motion vector is derived for each pixel.

22. A method of processing an image comprising deriving motion discontinuities representing motion boundaries in a motion vector field and adjusting motion vectors within each boundary on the basis of other motion vectors within that boundary.

5

23. A method of representing motion in a sequence of digitized images comprising generating and coding a plurality of versions of a motion vector field at different resolutions.

10

24. A method as claimed in claim 23 comprising sub-sampling the motion vector field to produce sub-sampled versions of the field at a first, coarse, resolution and at a second, finer, resolution, coding the coarse resolution version of the motion vector field, comparing the coarse resolution field with the finer resolution field to produce a residual error, and coding the residual error at the finer resolution.

15

25. A method as claimed in claim 24 comprising producing and coding a sequence of residual errors at increasing resolutions.

20

26. A method as claimed in any one of claims 23 to 25 comprising multiplexing the coded motion vector field versions at different resolutions into an embedded bit stream.

27. A method as claimed in any one of claims 23 to 25 wherein said coding is performed using vector quantization.

5           28. An encoder for encoding motion information for a sequence of digitized images according to a method as claimed in any one of claims 1 to 27.

10           29. A decoder for decoding motion information for a sequence of digitized images encoded according to a method as claimed in any one of claims 1 to 27.

15           30. An encoder for encoding motion information for a sequence of digitized images comprising a motion estimator for deriving a dense motion vector field for an image and a vector quantizer for coding the motion vector field.

20           31. Apparatus for representing motion in a sequence of digitized images comprising means for generating and coding a plurality of versions of a motion vector field at different resolutions.

32. Apparatus as claimed in claim 31 comprising means for sub-sampling the motion vector field to produce sub-sampled versions of the field at a first, coarse, resolution and at a second, finer, resolution, means for comparing the coarse resolution field with the finer resolution field to produce  
5 a residual error, and means for coding the coarse resolution motion vector field and the residual error at the finer resolution.

33. Apparatus as claimed in claim 32 comprising means for producing and coding a sequence of residual errors at increasing resolutions.  
10

34. A decoder for decoding information encoded using an apparatus as claimed in any of claims 31 to 33, the decoder comprising means for reinstating a version of the motion vector field at a desired resolution.

15 35. A hybrid DCT-MC codec comprising an encoder according to any one of claims 28, 30 or 31 to 33 and a decoder according to claim 29 or claim 34.

36. An encoder substantially as hereinbefore described and as  
20 shown in the accompanying drawings.

37. A method for encoding motion information substantially as hereinbefore described with reference to the accompanying drawings.

**ABSTRACT****Method and Apparatus for Motion Vector Field Encoding**

A method and apparatus for representing motion in a sequence of  
5 digitized images derives a dense motion vector field and vector quantizes the  
motion vector field.

Fig. 2





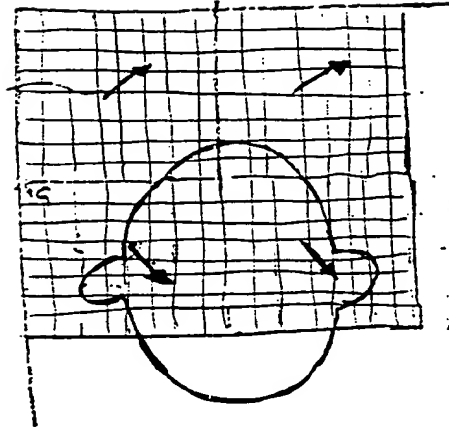


Fig. 1

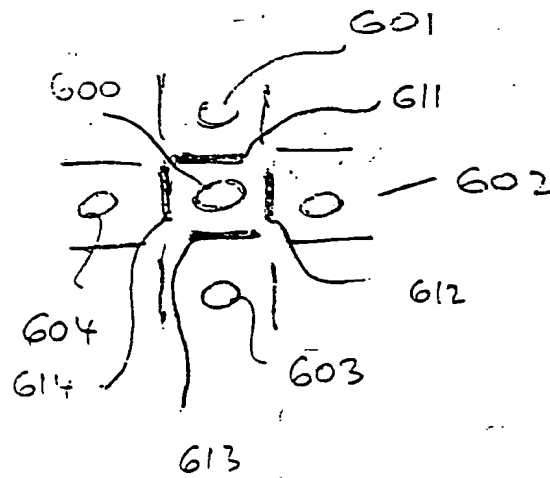


Fig. 3.

This Page Blank (uspto)

---

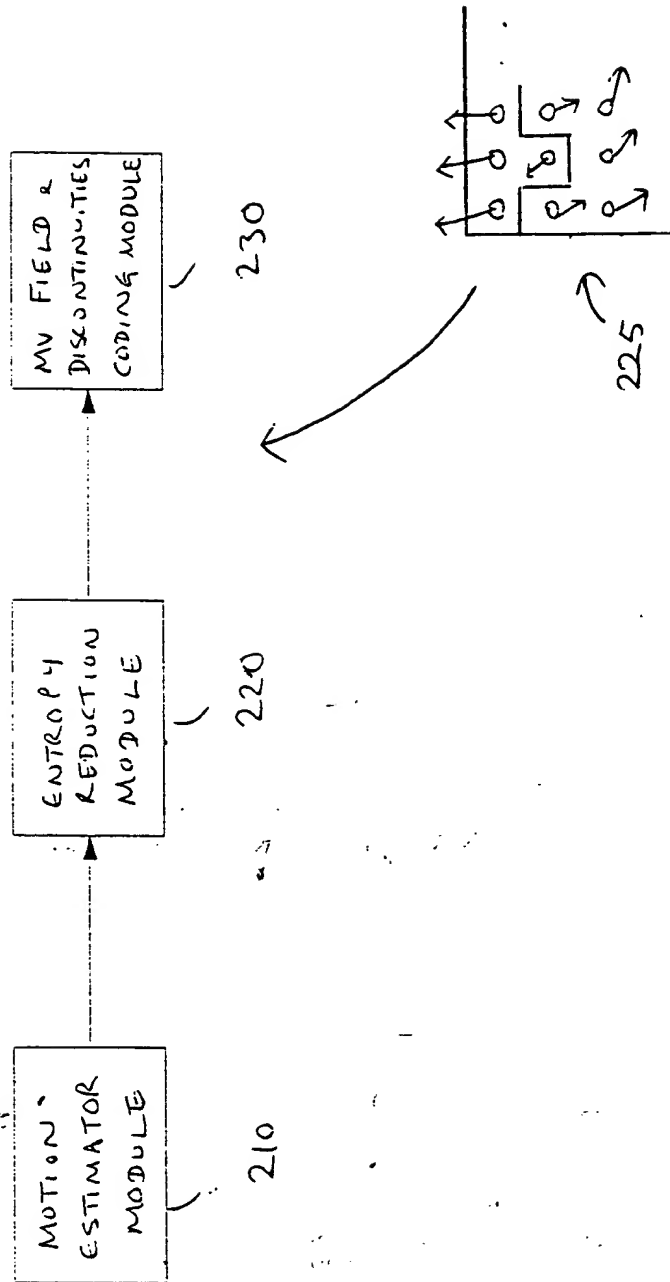


Fig. 2.

**This Page Blank (uspto)**

---

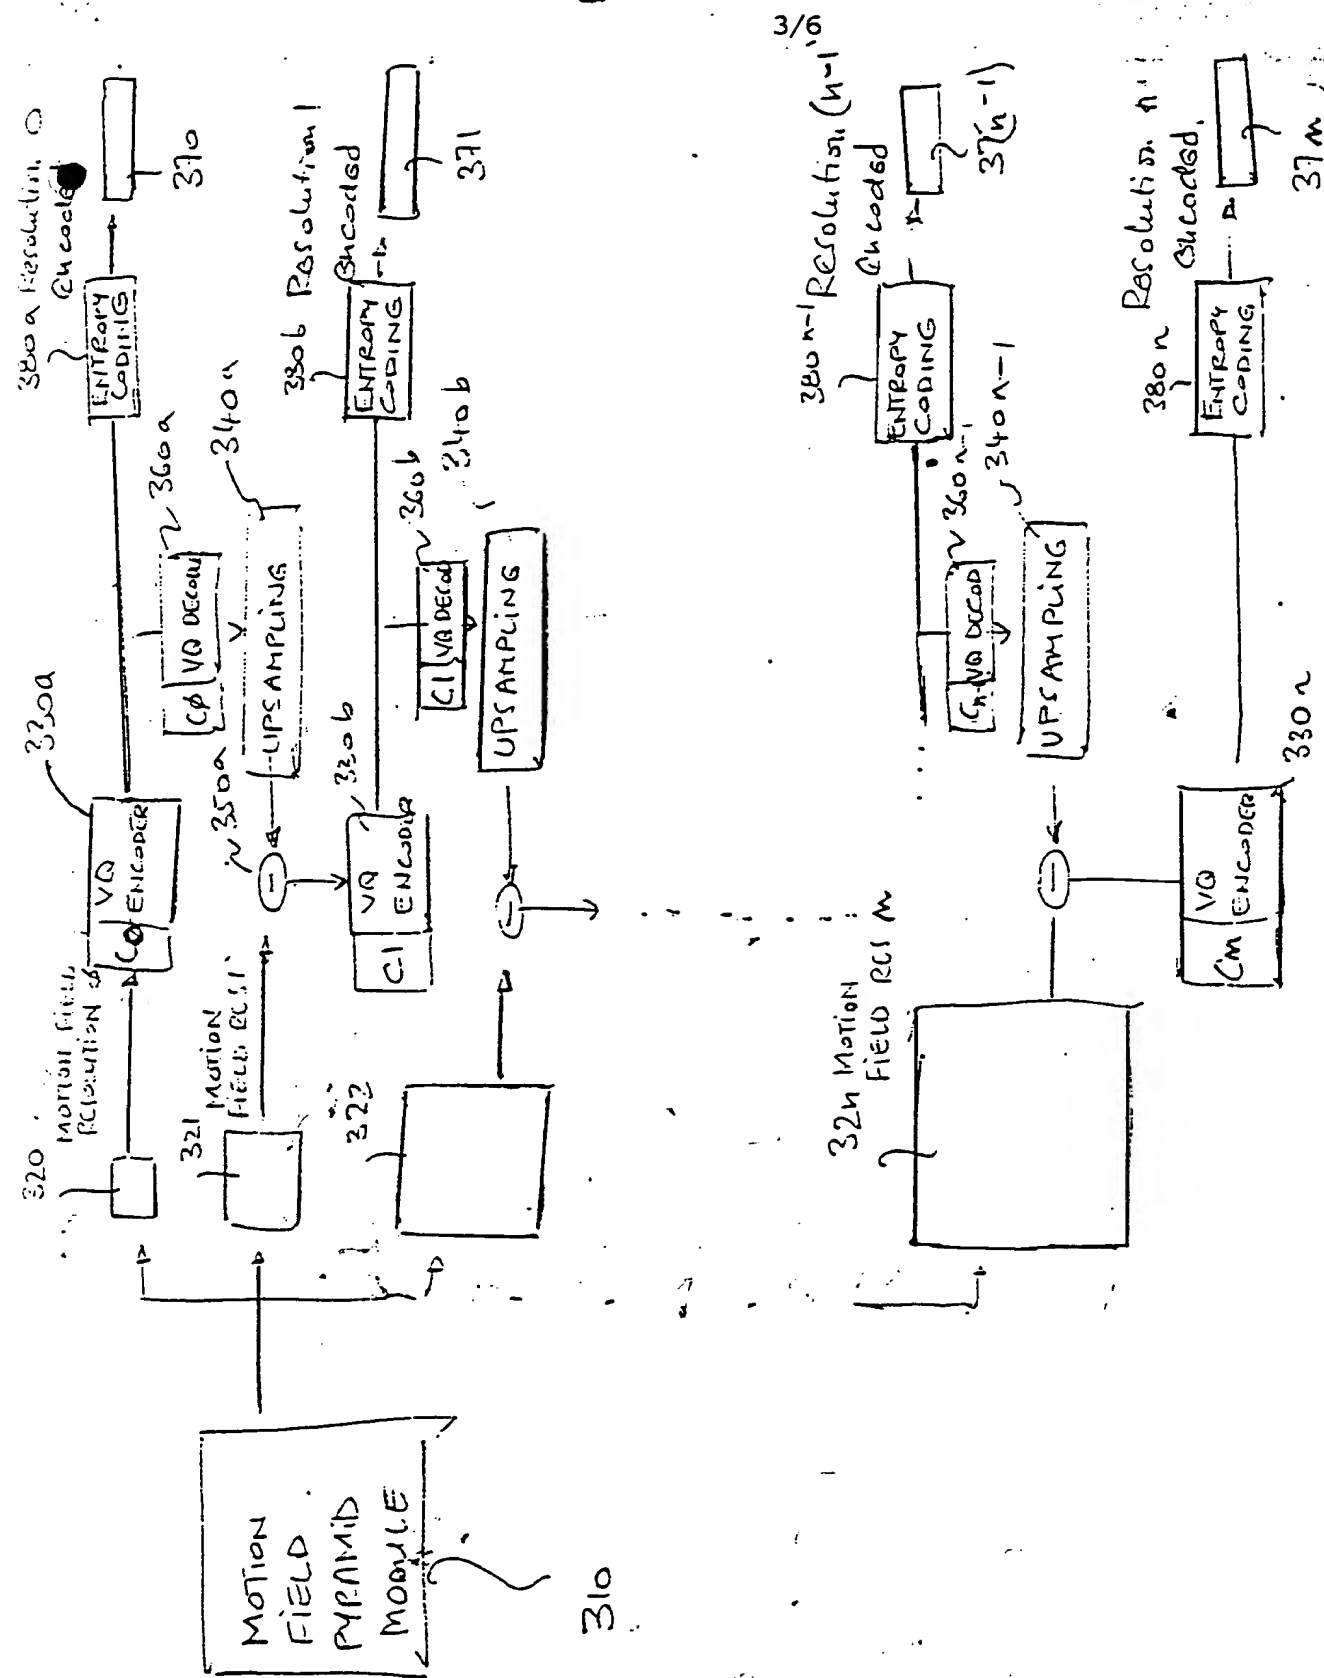


FIGURE 4

This Page Blank (uspto)

---

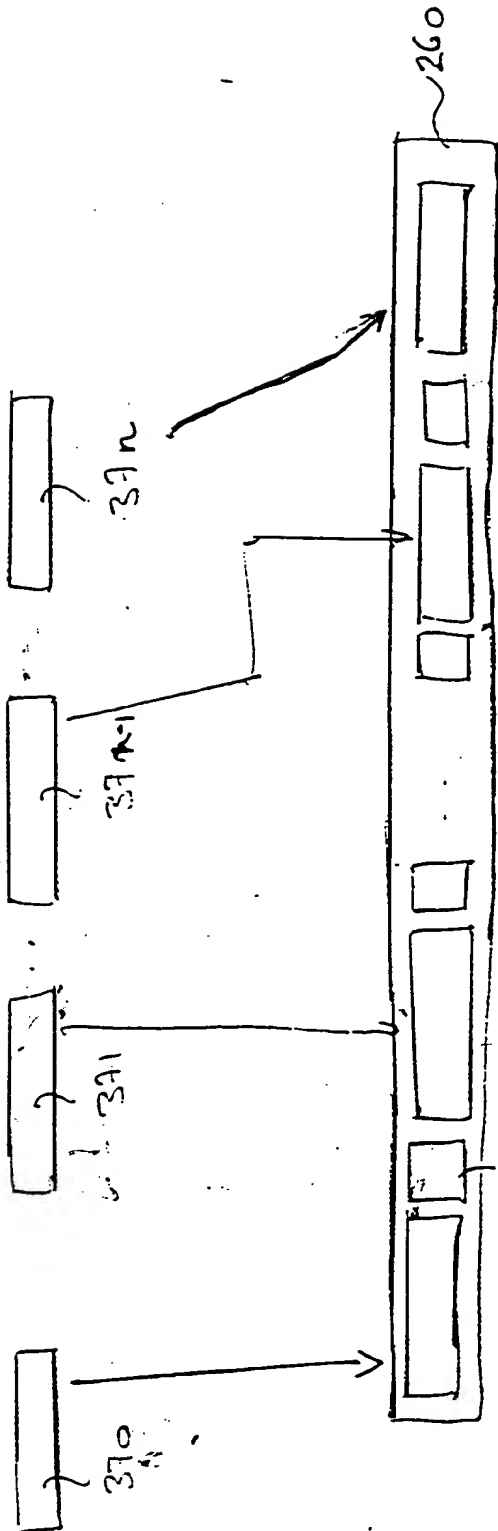


FIGURE 5

This Page Blank (uspto)

---





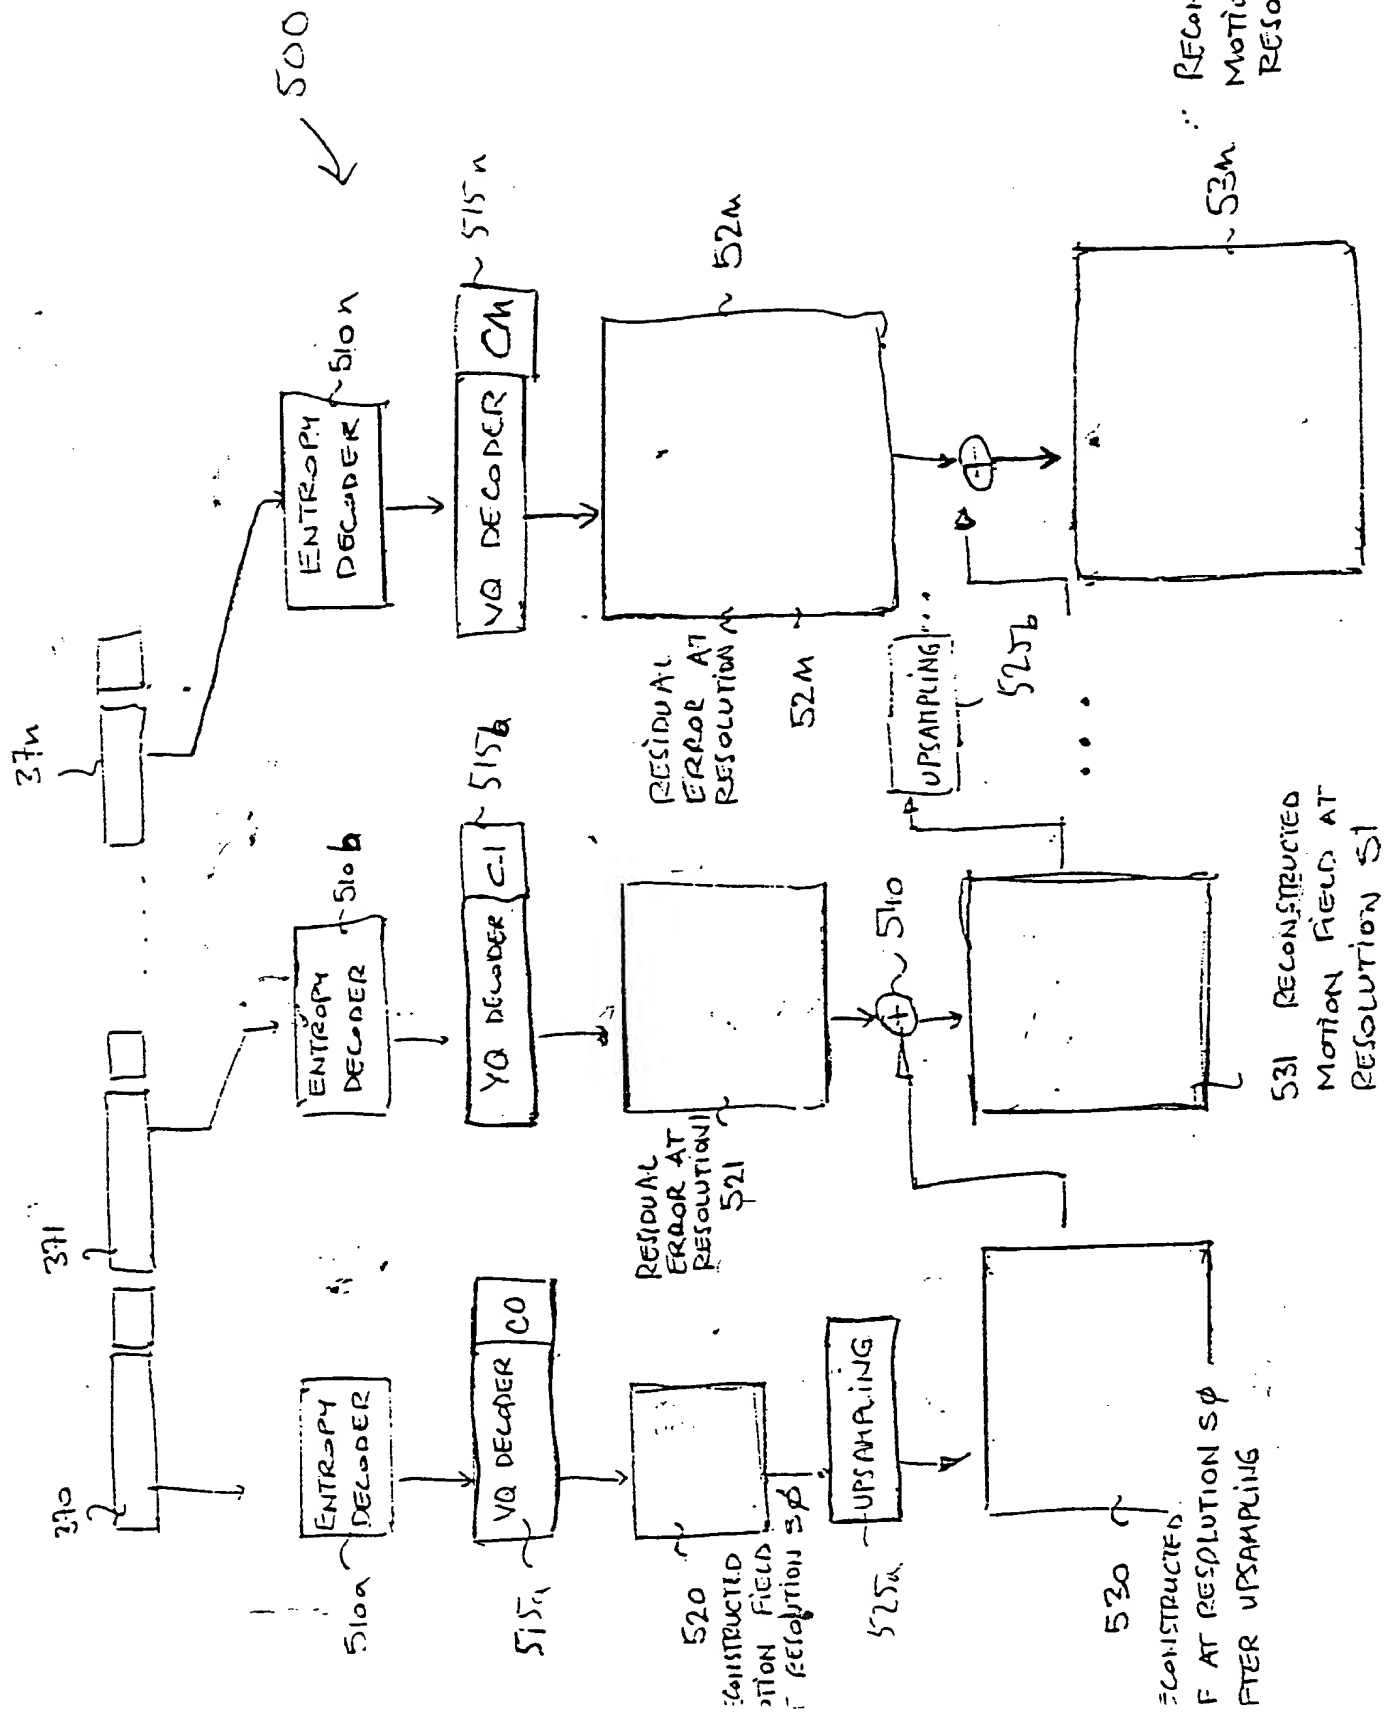


FIGURE 6

This Page Blank (uspto)

---

730

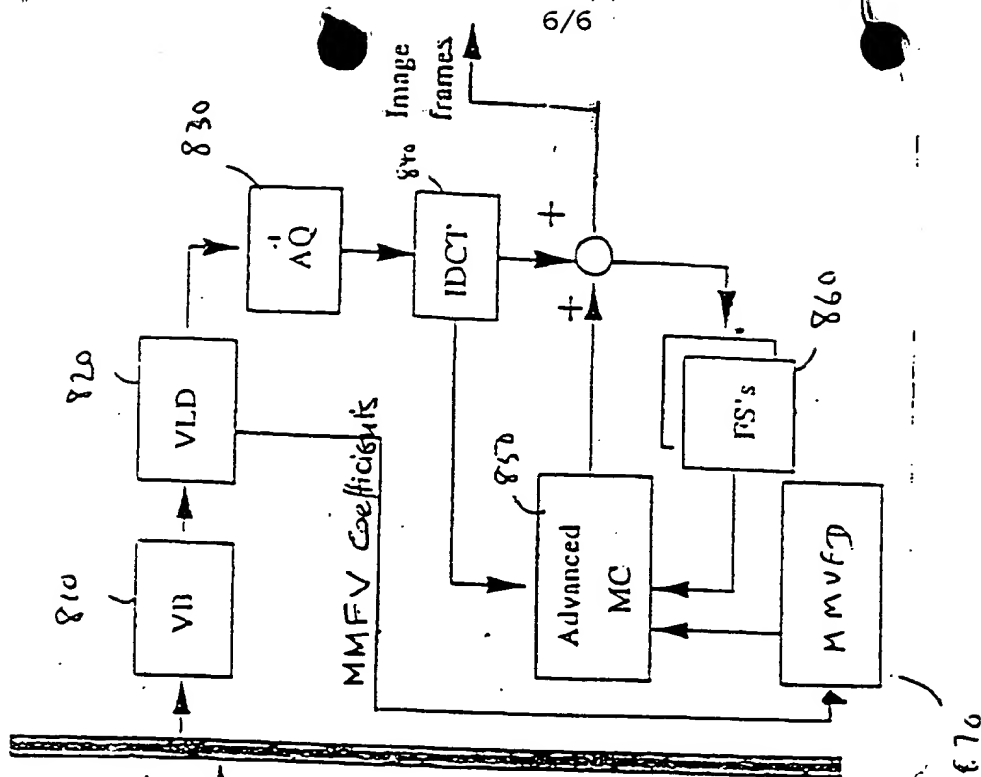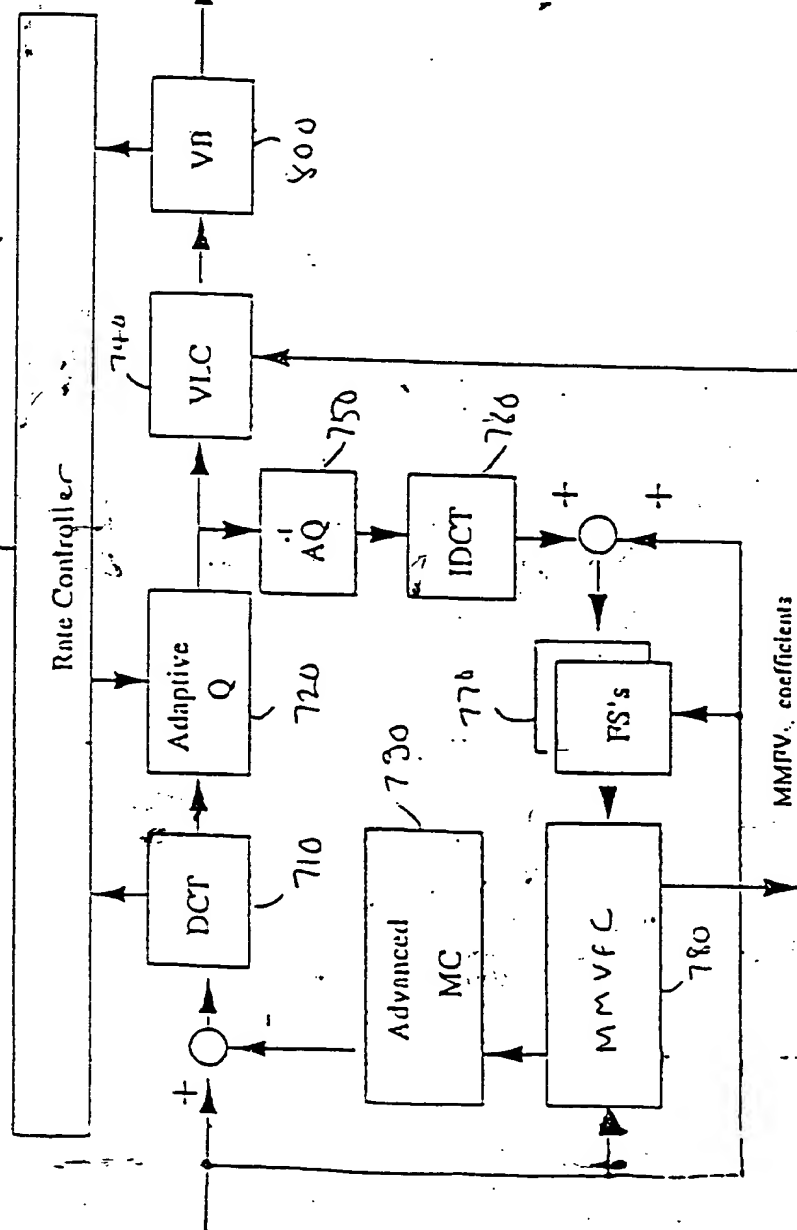

6/6

Image frames

Fig. 7

**This Page Blank (uspto)**

---